

Kantleak™ 3200 Series 3-Way Instrumentation Ball Valve



Part No.	End Connection		End Connection		End Connection
3211BV-JJXJ	1/8" MNPT	X	1/8" MNPT	X	1/8" MNPT
3211BV-LLXL	1/4" MNPT	X	1/4" MNPT	X	1/4" MNPT
3211BV-NNXN	3/8" MNPT	X	3/8" MNPT	X	3/8" MNPT
3211BV-PPXP	1/2" FNPT	X	1/2" FNPT	X	1/2" FNPT
3222BV-JJXJ	1/8" FNPT	X	1/8" FNPT	X	1/8" FNPT
3222BV-LLXL	1/4" FNPT	X	1/4" FNPT	X	1/4" FNPT
3222BV-NNXN	3/8" FNPT	X	3/8" FNPT	X	3/8" FNPT
3222BV-PPXP	1/2" FNPT	X	1/2" FNPT	X	1/2" FNPT
3244BV-S2	1/8" SHUR-LOK	X	1/8" SHUR-LOK	X	1/8" SHUR-LOK
3244BV-S4	1/4" SHUR-LOK	X	1/4" SHUR-LOK	X	1/4" SHUR-LOK
3244BV-S6	3/8" SHUR-LOK	X	3/8" SHUR-LOK	X	3/8" SHUR-LOK
3244BV-S8	1/2" SHUR-LOK	X	1/2" SHUR-LOK	X	1/2" SHUR-LOK

Kantleak™ Instrumentation Ball Valves are designed with double O-ring seal providing over 20,000 cycles without leakage and an exclusive stem seal that never needs tightening. Valves can be panel mounted for instrumentation applications.


Pressure Rating: up to 1,500 PSI
Temperature Rating: -40°F - 300°F

- ASTM B-16 Corrosion Resistant Brass Body
- Chrome plated brass ball
- Blow-out proof stem
- Quarter Turn Handle for Instantaneous On-Off Operations




PORTING OPTIONS

Style "A"

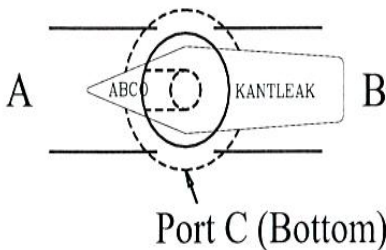

Style "B"

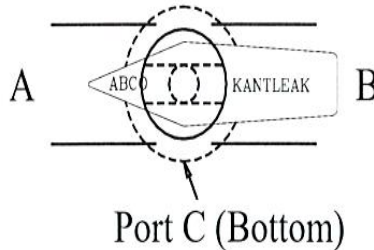

Style "C"

